



# Glaslide™

## Frameless Outdoor Sliding Glass Panel System

Outdoor spaces are increasingly being designed for greater flexibility - for a variety of uses and year-round living. The introduction of Frameless Sliding Glass Panels into an outdoor area creates a unique outdoor space, with the functionality of indoor spaces.

**Frameless** Outdoor Sliding Glass Panels provide a light and airy, semi-protected area which allows you to keep entertaining and enjoying the outdoors.

**Glaslide™** Glass Sliding Doors are designed and manufactured in NZ for Kiwi lifestyles, offering additional weather protection for outdoor spaces, especially those with opening louvre roofs. Easy to operate, Glaslide™ doors slide seamlessly on their low bottom tracks and automatically lock into place as they slide past each other. Designed within the NZ wind parameters, Glaslide™ doors are suited to a wide range of outdoor sites throughout NZ, helping you to achieve your dream outdoor living space.

*Custom made for your home*





### Features

- Double and triple track options
- Two, three, four and six panel configurations
- Low bottom track, just 22mm
- Opening of Glazing Space up to 80%
- Foot operated interconnecting locking system
- Maximum Panel weight 120 kgs
- High Quality Tandem Nylon and Stainless Steel Rollers
- Frameless glass panels in 10mm, 12mm and 15mm thicknesses, in accordance with NZS4223.3.206
- Extrusions powder coated in a wide range of Dulux Colours


### Maximum Dimensions

#### Glaslide Panel Sizes - Toughened Glass

In accordance with NZS 4223.3.2016

- Toughened Glass Max Panel Height is 3000mm
- Toughened Glass Max Panel width is 1100mm, up to max 2800 high
- Toughened Glass Max Panel width is 1000mm up to max 3000mm high

### System Sections

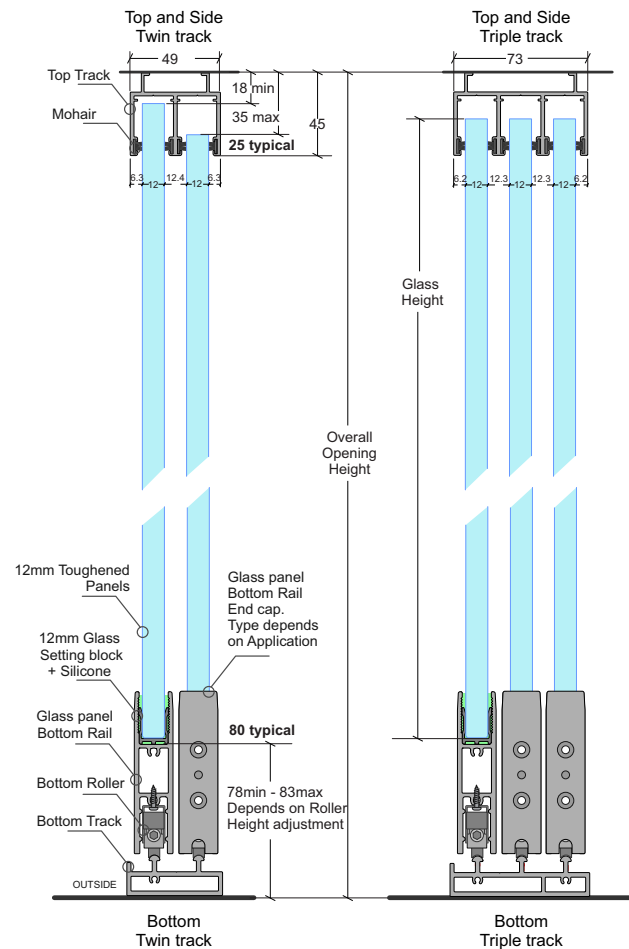

Panels available in 10mm, 12mm (shown) or 15mm Toughened Glass. For more information re multiple doors setouts refer to the product manual.

### MAX PANEL HEIGHT (not exceeding mm)

### GLASS TYPE MINIMUM Thickness (mm)

|      | Wind Zone (ULS) |                |              |                   |
|------|-----------------|----------------|--------------|-------------------|
|      | Low 0.72kpa     | Medium 0.96kpa | High 1.36kpa | Very High 1.76kpa |
| 2000 | 10mm            | 10mm           | 12mm         | 12mm              |
| 2400 | 12mm            | 12mm           | 15mm         | 15mm              |
| 2800 | 12mm            | 15mm           | 15mm         | N/A               |
| 3000 | 15mm            | 15mm           | N/A          | N/A               |

**masterspec partner**

SECTION 4522JB

[WWW.HOMEPLUS.CO.NZ](http://WWW.HOMEPLUS.CO.NZ)

The products in this brochure are the subject of intellectual property protection. All brands are either trademarks of Juralco Aluminium Building Products Ltd or used under licence. Dulux® is a registered trademark of Dulux Group (Australia) PTY LTD.

H/BR/GLASLIDE/20

